LF
LuxFlare
ARCHITECTURAL LED LIGHTING

PRODUCT DATASHEET
REV 02 · 2026 · 31/08


OUTDOOR LIGHTING · IN-GROUND

In-ground Light

uplight

LFIGFR-8W-3K-IP67-BK

Product overview to be supplied.

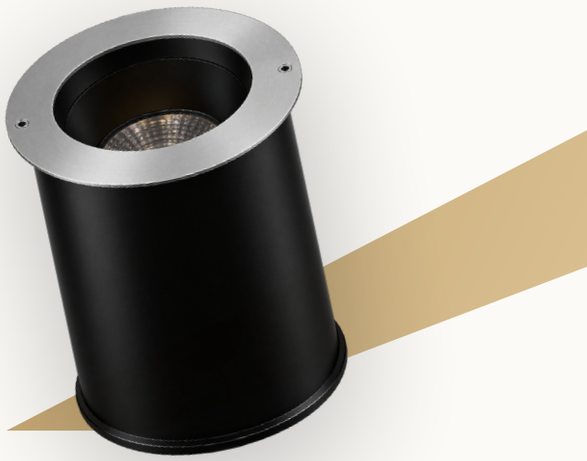

MOUNTING

Floor recessed

LUMINAIRE DETAILS

Product Code	LFIGFR-8W-3K-IP67-BK	Application Area	Outdoor
Product Type	In-ground Light		

PRODUCT DETAILS

Wattage	8 W	Luminous Flux	560 lm	Driver	60W
Colour Temp.	3000 K	CRI	> 80	Dimming	—
IP Rating	IP67	Beam Angle	30°	Input Voltage	24V DC
Chip Type	SMD	Life Time	50,000 Hours		

PHYSICAL DETAILS

Housing Material	Alu Die Cast · Stainless Steel	Diffuser Optics	Clear	Operating Temp.	-20°C to +55°C
Diffuser Material	Glass	Size	Ø 80 × H 105 mm	Storage Temp.	-20°C to +80°C

DIMENSIONAL DRAWING · MM



FINISHES

Black

LED

Cree · Lumileds · Bridgelux · VS · Tridonic · Epistar

DRIVER

VS · Tridonic · Philips · Osram · Lifud · Eaglerise · Luxflare

SUMMARY

WATTAGE	CCT	INGRESS	FINISH
8	3000	67	BK

Technical data in accordance with EN 60598-1, EN 62031, EN IEC 63000 (RoHS), EU LVD 2014/35/EU and EN/IEC 60529 (IP code). We reserve the right to make technical and design changes.