




INDOOR LIGHTING · LED DOWNLIGHTS

Down Light

recessed

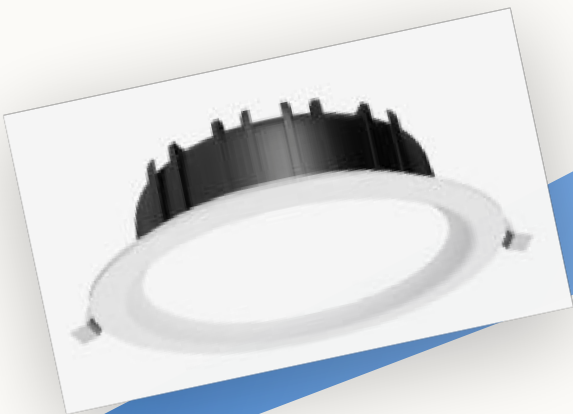

LF-DL-C-R-A-30W-3K-IP40

Product overview to be supplied.

MOUNTING

Ceiling recessed

LUMINAIRE DETAILS

Product Code	LF-DL-C-R-A-30W-3K-IP40	Application Area	Indoor
Product Type	Down Light		

PRODUCT DETAILS

Wattage	30 W	Luminous Flux	2400 lm	Driver	EXTERNAL
Colour Temp.	3000 K	CRI	> 80	Dimming	Non-Dimmable (On/Off)
IP Rating	IP20	Beam Angle	24° · 30° · 36°	Input Voltage	230V AC
Chip Type	COB · SMD	Life Time	50,000 Hours		


PHYSICAL DETAILS

Housing Material	Alu Die Cast	Size	Ø220 × H 60 mm	Storage Temp.	-20°C to +50°C
Diffuser Material	Polycarbonate (PC)	Cutout	195 mm		
Diffuser Optics	Opal	Operating Temp.	-20°C to +40°C		

DIMENSIONAL DRAWING · MM



PHOTOMETRIC · POLAR



FINISHES



LED

Cree Lumileds Bridgelux VS Tridonic Epistar

DRIVER

VS Tridonic Philips Osram Lifud Eaglerise
Luxflare

SUMMARY

WATTAGE
30

CCT
3000

INGRESS
20

FINISH
WH · BK · DG

Technical data in accordance with EN 60598-1, EN 62031, EN IEC 63000 (RoHS), EU LVD 2014/35/EU and EN/IEC 60529 (IP code). We reserve the right to make technical and design changes.