



INDOOR LIGHTING · LED STRIP

Strip Light

flexible



LFSRS-10W-2.7/3/4/5/6K-IP65-CS

Product overview to be supplied.

MOUNTING

Surface

LUMINAIRE DETAILS

Product Code	LFSRS-10W-2.7/3/4/5/6K-IP65-CS	Application Area	Indoor
Product Type	Strip Light		

PRODUCT DETAILS



Wattage	10 W	Luminous Flux	1100 lm	Driver	EXTERNAL
Colour Temp.	2700 / 3000 / 4000 / 5000 / 6000 K	CRI	90	Dimming	Non-Dimmable (On/Off)
IP Rating	IP65	Beam Angle	120°	Input Voltage	24V DC
Chip Type	COB	Life Time	50,000 Hours		

PHYSICAL DETAILS

Housing Material	High-pressure cast aluminum and aluminum alloy	Operating Temp.	-20°C to +40°C
Size	W 8 mm	Storage Temp.	-20°C to +50°C

Additional specifications

LED quantity	480 Led/M	Cutting interval	100mm (3.93") cutting length	Storage temperature	-30~80°C
Length per reel	5M - 10M	Working temperature	-20~50°C	Lamp survival factor (L80 at 50,000 h)	0.98 at 100,000 h

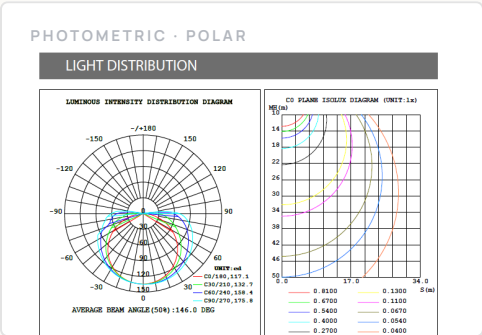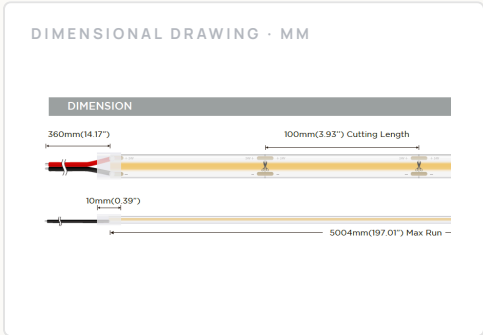

FINISHES

Custom Colour

LED

Cree

Lumileds

Bridgelux

VS

Tridonic

Epistar

DRIVER

VS

Tridonic

SUMMARY			
WATTAGE	CCT	INGRESS	FINISH
10	2700 · 3000 · 4000 · 5000 · 6000	65	CS