LF
LuxFlare
ARCHITECTURAL LED LIGHTING

PRODUCT DATASHEET
REV 02 · 2026 · 01/09

INDOOR LIGHTING · SPOT LIGHTS

Spot Light

Waterproof

LFSLCR-18W-4K-IP54-WH

Product overview to be supplied.



MOUNTING

Ceiling recessed

LUMINAIRE DETAILS

Product Code	LFSLCR-18W-4K-IP54-WH	Application Area	Indoor
Product Type	Spot Light		


PRODUCT DETAILS

Wattage	18 W	Chip Type	SMD	Driver	External
Colour Temp.	4000 K	CRI	› 80	Dimming	Non-Dimmable (On/Off)
IP Rating	IP54	Life Time	50,000 Hours		

PHYSICAL DETAILS

Housing Material	Alu Die Cast	Size	Ø 110 × H 115 mm	Operating Temp.	-20°C to +40°C
Diffuser Material	Glass	Cutout	90 mm	Storage Temp.	-20°C to +50°C

DIMENSIONAL DRAWING · MM

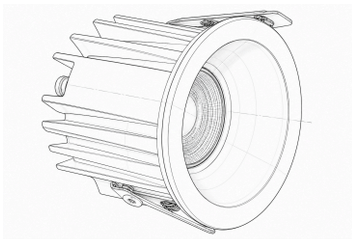

FINISHES

White

LED

Cree · Lumileds · Bridgelux · VS · Tridonic · Epistar

DRIVER

Luxflare

SUMMARY

WATTAGE	CCT	INGRESS	FINISH
18	4000	54	WH

Technical data in accordance with EN 60598-1, EN 62031, EN IEC 63000 (RoHS), EU LVD 2014/35/EU and EN/IEC 60529 (IP code). We reserve the right to make technical and design changes.