




INDOOR LIGHTING · LED DOWNLIGHTS

Surface Light

compact surface

LFDLCS-5/10/20W-3/4K-IP65

Compact 5W surface-mounted light – a small five-cell die-cast block with a wide 120° wash, in four housing finishes.

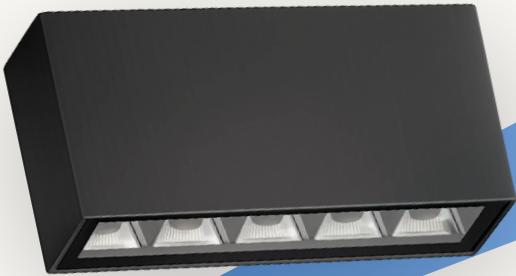

MOUNTING

- Wall surface
- Standalone

LUMINAIRE DETAILS



Product Code	LFDLCS-5/10/20W-3/4K-IP65	Application Area	Indoor
Product Type	Down Light		

PRODUCT DETAILS

Wattage	5 / 10 / 20 W	Luminous Flux	550 lm	Driver	Integrated
Colour Temp.	3000 / 4000 K	CRI	> 80 · > 90	Dimming	0-10V / 1-10V
IP Rating	IP65	Beam Angle	Medium (20°-35°)		
Chip Type	COB	Life Time	50,000 Hours		

PHYSICAL DETAILS

Housing Material	Alu Die Cast · Polycarbonate (PC) · Stainless Steel · Sheet Steel (CRCA)	Diffuser Optics	Clear · Opal · Lens	Operating Temp.	-20°C to +40°C
Diffuser Material	Polycarbonate (PC) · Acrylic (PMMA)	Size	Ø10 × H 10 mm	Storage Temp.	-20°C to +50°C

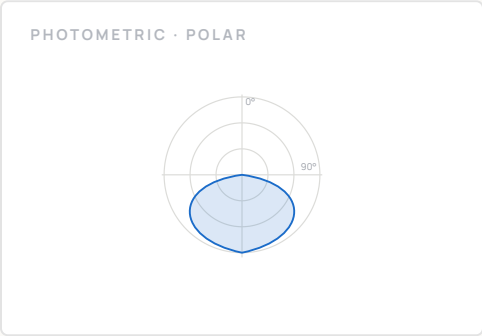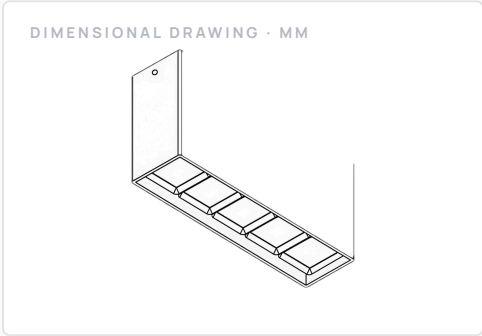

LIGHT DISTRIBUTION

120°

FINISHES

Black

Silver Gray

Dark Gray

White

LED

Bridgelux

Epistar

Osram

DRIVER

Lifud

Eaglerise

Luxflare

SUMMARY			
WATTAGE	CCT	INGRESS	FINISH
5 · 10 · 20	3000 · 4000	65	BK · SG · DG · WH

Technical data in accordance with EN 60598-1, EN 62031, EN IEC 63000 (RoHS), EU LVD 2014/35/EU and EN/IEC 60529 (IP code). We reserve the right to make technical and design changes.