



INDOOR LIGHTING · LINEAR PROFILES

Surface Magnetic Track

48V rail

LFLNCS-BK

The 48 V magnetic rail that LUXFLARE magnetic heads mount to – surface-fixed to the ceiling and supplied in one, two or three metre lengths. Die-cast aluminium, 27 mm wide, in black.

MOUNTING

Ceiling surface

LUMINAIRE DETAILS




Product Code	LFLNCS-BK	Application Area	Indoor
Product Type	Linear Light		

PRODUCT DETAILS

Wattage	—	IP Rating	—	Input Voltage	48V DC
Colour Temp.	—	Life Time	50,000 Hours		

PHYSICAL DETAILS

Housing Material	Alu Die Cast	Operating Temp.	-20°C to +40°C
Size	L 1000 / 2000 / 3000 x W 27mm	Storage Temp.	-20°C to +50°C

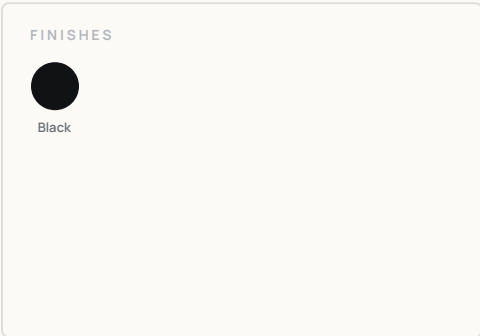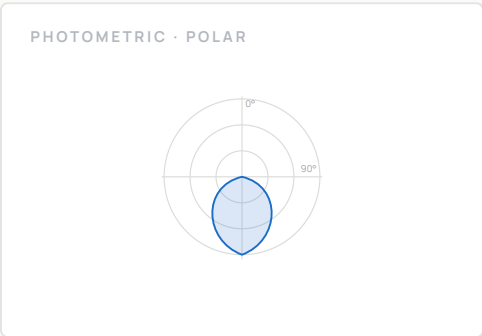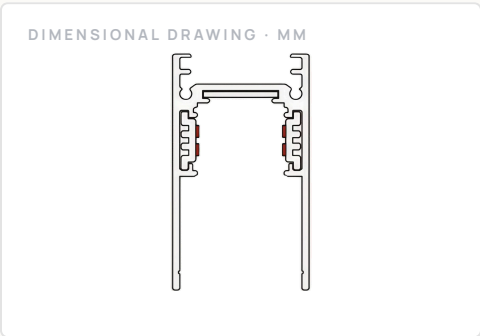

LED

Cree

Lumileds

Bridgelux

VS

Tridonic

Epistar

DRIVER

VS

Tridonic

Philips

Osram

Lifud

Eaglerise

Luxflare

SUMMARY			
WATTAGE	CCT	INGRESS	FINISH
—	—	—	BK

Technical data in accordance with EN 60598-1, EN 62031, EN IEC 63000 (RoHS), EU LVD 2014/35/EU and EN/IEC 60529 (IP code). We reserve the right to make technical and design changes.