



OUTDOOR LIGHTING · LED DOWNLIGHTS

Recessed Downlight IP67

IP67 recessed

LFDLCR-15W-3K-IP67

A Ø170 mm recessed downlight for exterior use, 15 W COB/SMD behind a glass diffuser with five selectable beam angles from 8° to 60°, and dual voltage input (230V AC or 24V DC). Rated IP67.

MOUNTING

Recessed

LUMINAIRE DETAILS



Product Code	LFDLCR-15W-3K-IP67	Application Area	Outdoor
Product Type	Down Light		

PRODUCT DETAILS

Wattage	15 W	Luminous Flux	1995 lm	Driver	External / Integrated
Colour Temp.	3000 K	CRI	> 80	Dimming	Non-Dimmable (On/Off)
IP Rating	IP67	Beam Angle	8° · 15° · 30° · 45° · 60°	Input Voltage	230V AC · 24V DC
Chip Type	COB · SMD	Life Time	50,000 Hours		

PHYSICAL DETAILS

Housing Material	Alu Die Cast	Diffuser Optics	Clear	Operating Temp.	-20°C to +55°C
Diffuser Material	Glass	Size	Ø170 × H 43 mm	Storage Temp.	-20°C to +80°C

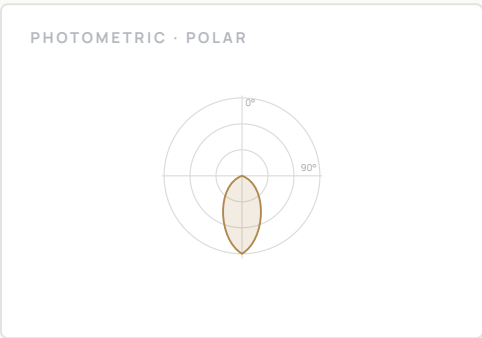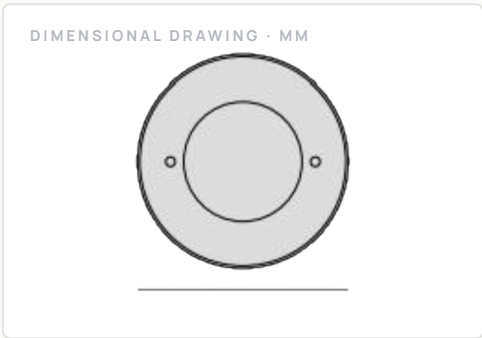

LIGHT DISTRIBUTION

8°15°30°45°60°

FINISHES

White

LED

CreeBridgeluxEpistar

DRIVER

LifudLuxflare

SUMMARY			
WATTAGE	CCT	INGRESS	FINISH
15	3000	67	WH

Technical data in accordance with EN 60598-1, EN 62031, EN IEC 63000 (RoHS), EU LVD 2014/35/EU and EN/IEC 60529 (IP code). We reserve the right to make technical and design changes.