




INDOOR LIGHTING · SPOT LIGHTS

Spot Light IP65

adjustable

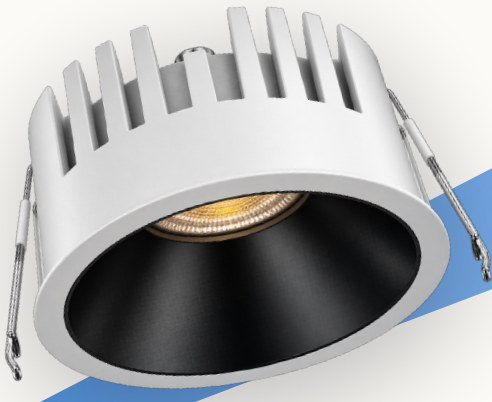

LFSLCR-18W-4K-IP65-WH

Product overview to be supplied.

MOUNTING

Ceiling recessed

LUMINAIRE DETAILS

Product Code	LFSLCR-18W-4K-IP65-WH	Application Area	Indoor
Product Type	Spot Light		


PRODUCT DETAILS

Wattage	18 W	Luminous Flux	1980 lm	Driver	—
Colour Temp.	4000 K	CRI	> 80	Dimming	Non-Dimmable (On/Off)
IP Rating	IP65	Beam Angle	36°	Input Voltage	230V AC
Chip Type	COB	Life Time	50,000 Hours		


PHYSICAL DETAILS

Housing Material	Alu Die Cast	Size	Ø102 × H 65 mm	Storage Temp.	-20°C to +50°C
Diffuser Material	Acrylic (PMMA)	Cutout	95 mm		
Diffuser Optics	Lens	Operating Temp.	-20°C to +40°C		

DIMENSIONAL DRAWING · MM

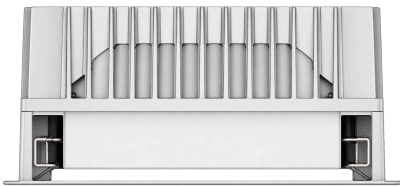

PHOTOMETRIC · POLAR



FINISHES



White

LED

Cree Lumileds Bridgelux VS Tridonic Epistar

DRIVER

VS Tridonic Philips Osram Lifud Eaglerise
Luxflare

SUMMARY

WATTAGE
18

CCT
4000

INGRESS
65

FINISH
WH

Technical data in accordance with EN 60598-1, EN 62031, EN IEC 63000 (RoHS), EU LVD 2014/35/EU and EN/IEC 60529 (IP code). We reserve the right to make technical and design changes.