LF
LuxFlare
ARCHITECTURAL LED LIGHTING




INDOOR LIGHTING · WALL LUMINAIRES

# Wall Light

*Recessed*

**LFWLWR-5W-3K-IP65-BK**

Product overview to be supplied.

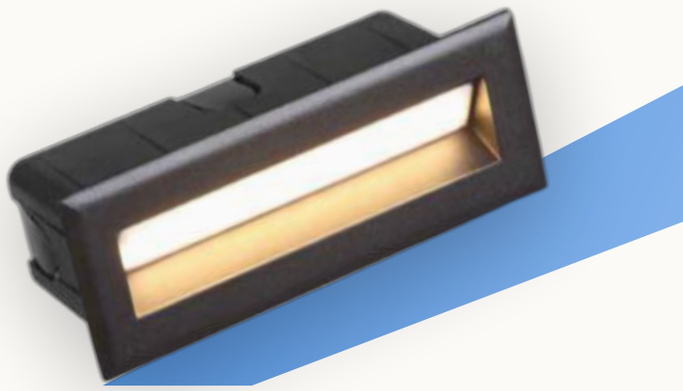

MOUNTING

Wall recessed

## LUMINAIRE DETAILS

| | | | |
|---|---|---|---|
| Product Code | LFWLWR-5W-3K-IP65-BK | Application Area | Indoor |
| Product Type | Wall Light | | |


## PRODUCT DETAILS

| | | | | | |
|---|---|---|---|---|---|
| Wattage | 5 W | Luminous Flux | 375 lm | Driver | Integrated |
| Colour Temp. | 3000 K | CRI | > 80 | Dimming | Non-Dimmable (On/Off) |
| IP Rating | IP65 | Beam Angle | 50° | Input Voltage | 230V AC |
| Chip Type | SMD | Life Time | 50,000 Hours | | |

## PHYSICAL DETAILS

| | | | | | |
|---|---|---|---|---|---|
| Housing Material | Alu Die Cast | Diffuser Optics | Opal | Operating Temp. | -20°C to +40°C |
| Diffuser Material | Polycarbonate (PC) | Size | L 135 × W 55 × H 60 mm | Storage Temp. | -20°C to +50°C |

DIMENSIONAL DRAWING · MM

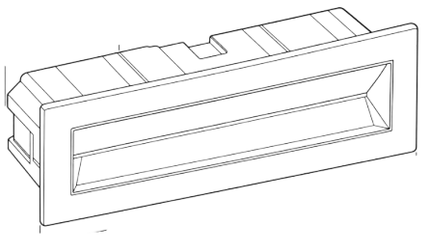

FINISHES

Black

LED

Cree · Lumileds · Bridgelux · VS · Tridonic · Epistar

DRIVER

Luxflare

## SUMMARY

| WATTAGE | CCT | INGRESS | FINISH |
|---|---|---|---|
| 5 | 3000 | 65 | BK |

Technical data in accordance with EN 60598-1, EN 62031, EN IEC 63000 (RoHS), EU LVD 2014/35/EU and EN/IEC 60529 (IP code). We reserve the right to make technical and design changes.